


Weatherproofing & Sealing Systems

- Low Slope/Low Pitch Roofs
- Underlayments
- Sealing Dormer Additions
- Eaves
- Roof Valleys
- Metal Roof Seams
- Full-Roof Underlayments
- Skylight Flashing
- Roof Vent Flashing
- Chimney Flashing
- Weather & Waterproofing
- Window Sealing
- Waterproofing Block and Poured Concrete Foundations
- Tile Roof Ridges
- Sealing Structural Decks
- Sill Plates
- Thresholds
- Door Casings
- Stucco Underlayment
- Joint Seals
- Ductwork Waterproofing
- Post & Pole Supports
- Porch Roofs
- Mobile Home Roofs

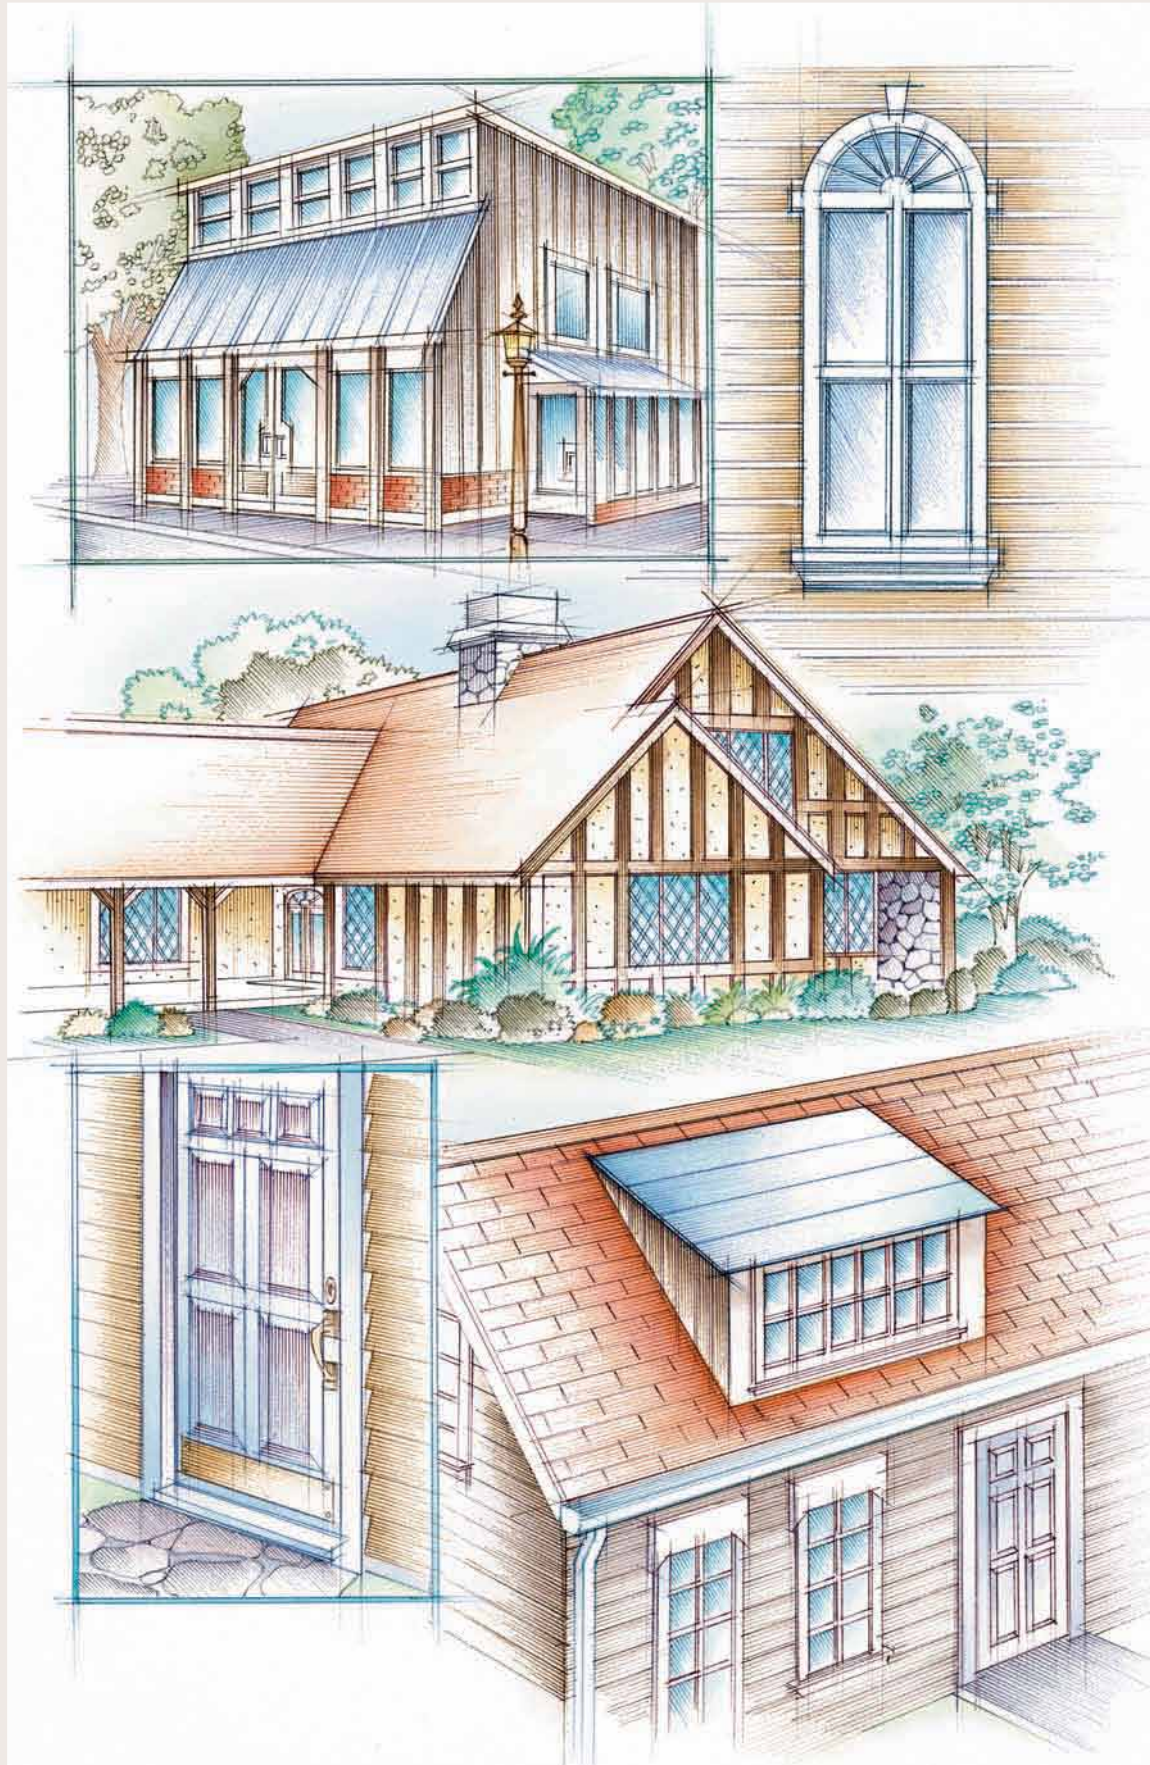


An important consideration in the construction of industrial buildings, commercial or retail properties, and private residences, is selecting correct and effective water-proofing and weather barriers for the structure.

Meeting the challenge to develop products designed for these tasks is MFM Building Products Corporation. With manufacturing and corporate headquarters located in central Ohio, MFM has focused on developing, testing, and producing specialty sealing materials for over 40 years.

Initially, MFM manufactured products used for wrapping underground pipe installations where protection from weather, water and ground damage, and prevention of pipe contents from contaminating soil, are vital in maintaining total system integrity. Building upon their experience and the company's success in this market, MFM expanded these technologies to develop sealing and water-proofing products for use within the general construction industry.

Today, MFM is *the* recognized innovator and manufacturer of asphalt-coated, self-adhesive, self-sealing membranes specified in all types of construction projects. The MFM product line-up of weather-resistant materials is extensive: sealing applications for numerous roof types (including low slope/low pitch configurations), block and poured concrete foundations, weatherproofing barriers for window and door installations, and flashing for chimneys, eaves, ducts, and skylights.

Whether your project is new construction, an addition, upgrade or repair, rely on MFM Building Products Corporation for the best sealing solutions available.

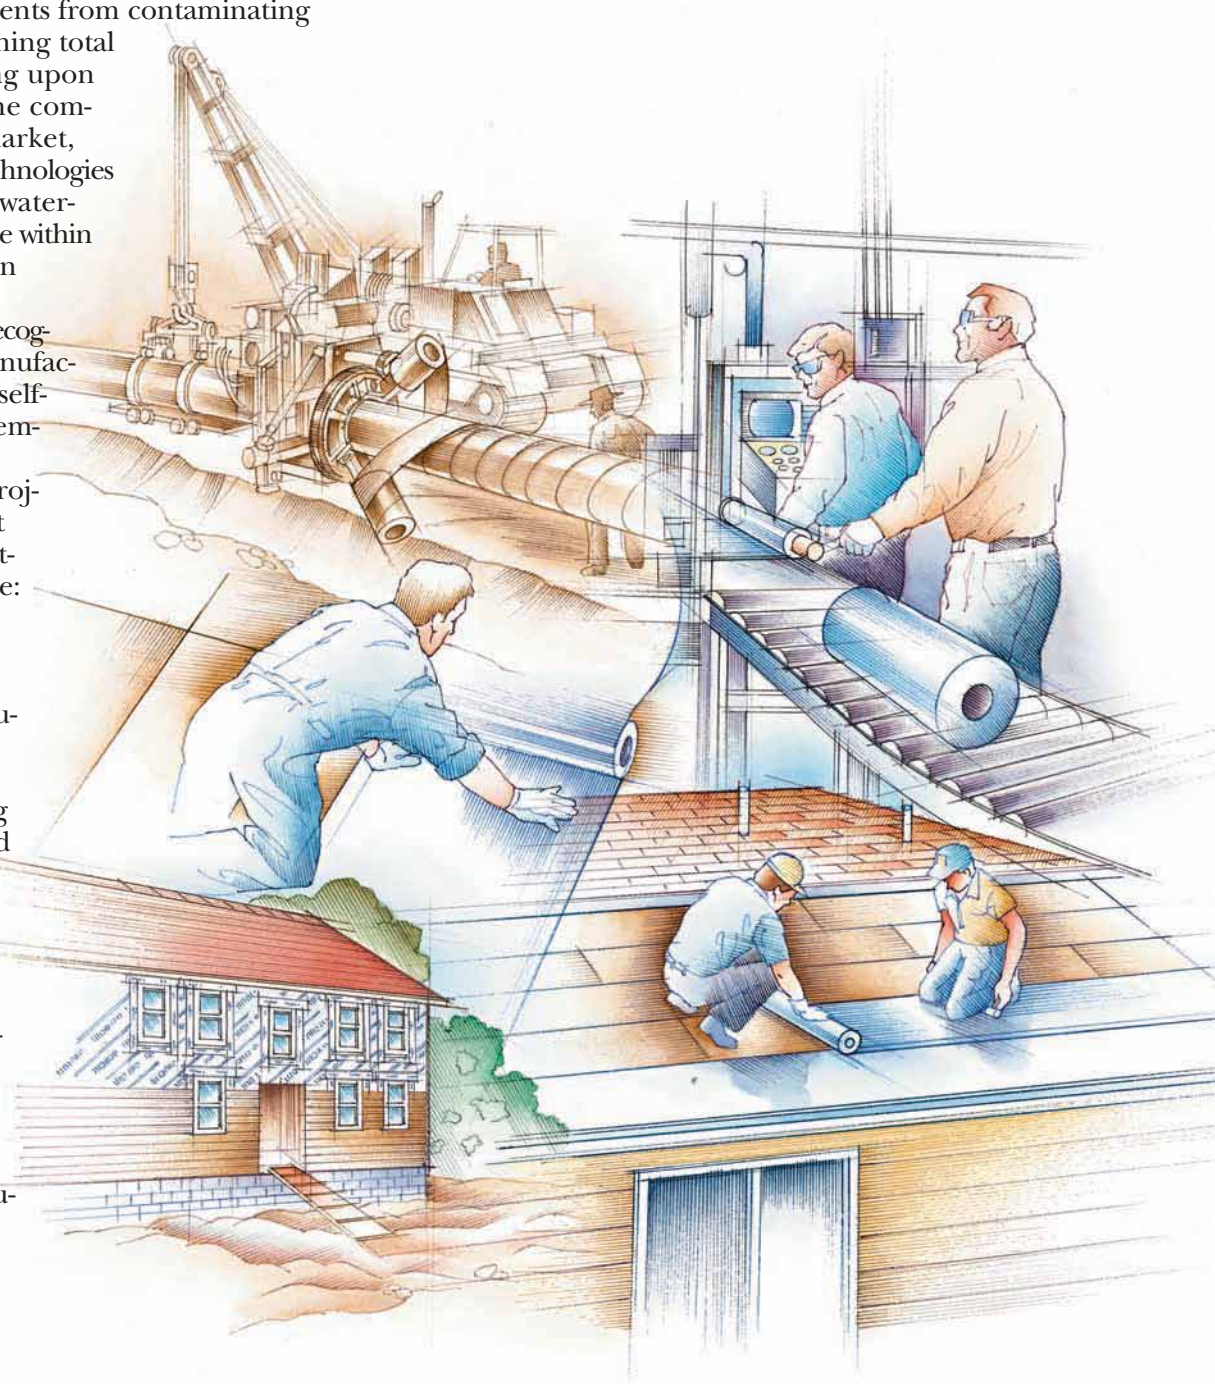



Peel & Seal™ is the original, self-stick roll roofing specifically designed by MFM for all low slope applications. Composed of a patented formula (consisting of laminated aluminized foil, high-density polymer films and a thick layer of rubberized asphalt), Peel & Seal provides a long lasting, durable, maintenance-free roofing surface.

From dormers, residential sunroom additions, “open” porches, and mobile home roofs, to industrial and agricultural buildings where low slope roofs are commonplace, Peel & Seal is an excellent solution for these applications. The self-adhering, weatherproof, reflective surface not only forms a highly effective barrier to the elements, but also limits solar heating to help keep the temperature of building interiors significantly cooler.


Applying Peel & Seal is easy. No tar, torches, mops, glues, tapes, or fasteners are required... a scissors or knife and hand roller are the only tools needed. Following preparation of the surface, simply peel off the release paper, unroll Peel & Seal to the proper length, and press into place.


Maintenance-free Peel & Seal will not crack or dry out after being applied, is available in a choice of finishes (aluminum, almond,

white, and granite gray), and conveniently sized in 100 sq. ft. cartons in roll widths of 3", 4", 6", 9", 12", 18" and 36".

Peel & Seal is perfect for hundreds of uses ranging from full-roof applications to patching gutters and vent pipes. Fully pliable and providing a secure seal at edges, corners and over gaps, it is ideal for roof areas that are often difficult to waterproof, including locations where ducts, vents, chimneys, or air conditioning units either protrude through, or are roof mounted.

Peel & Seal: The original, maintenance-free, energy efficient, economical, self-sealing roll roofing you can count on for any low slope/low pitch application... and warranted by MFM for ten full years!

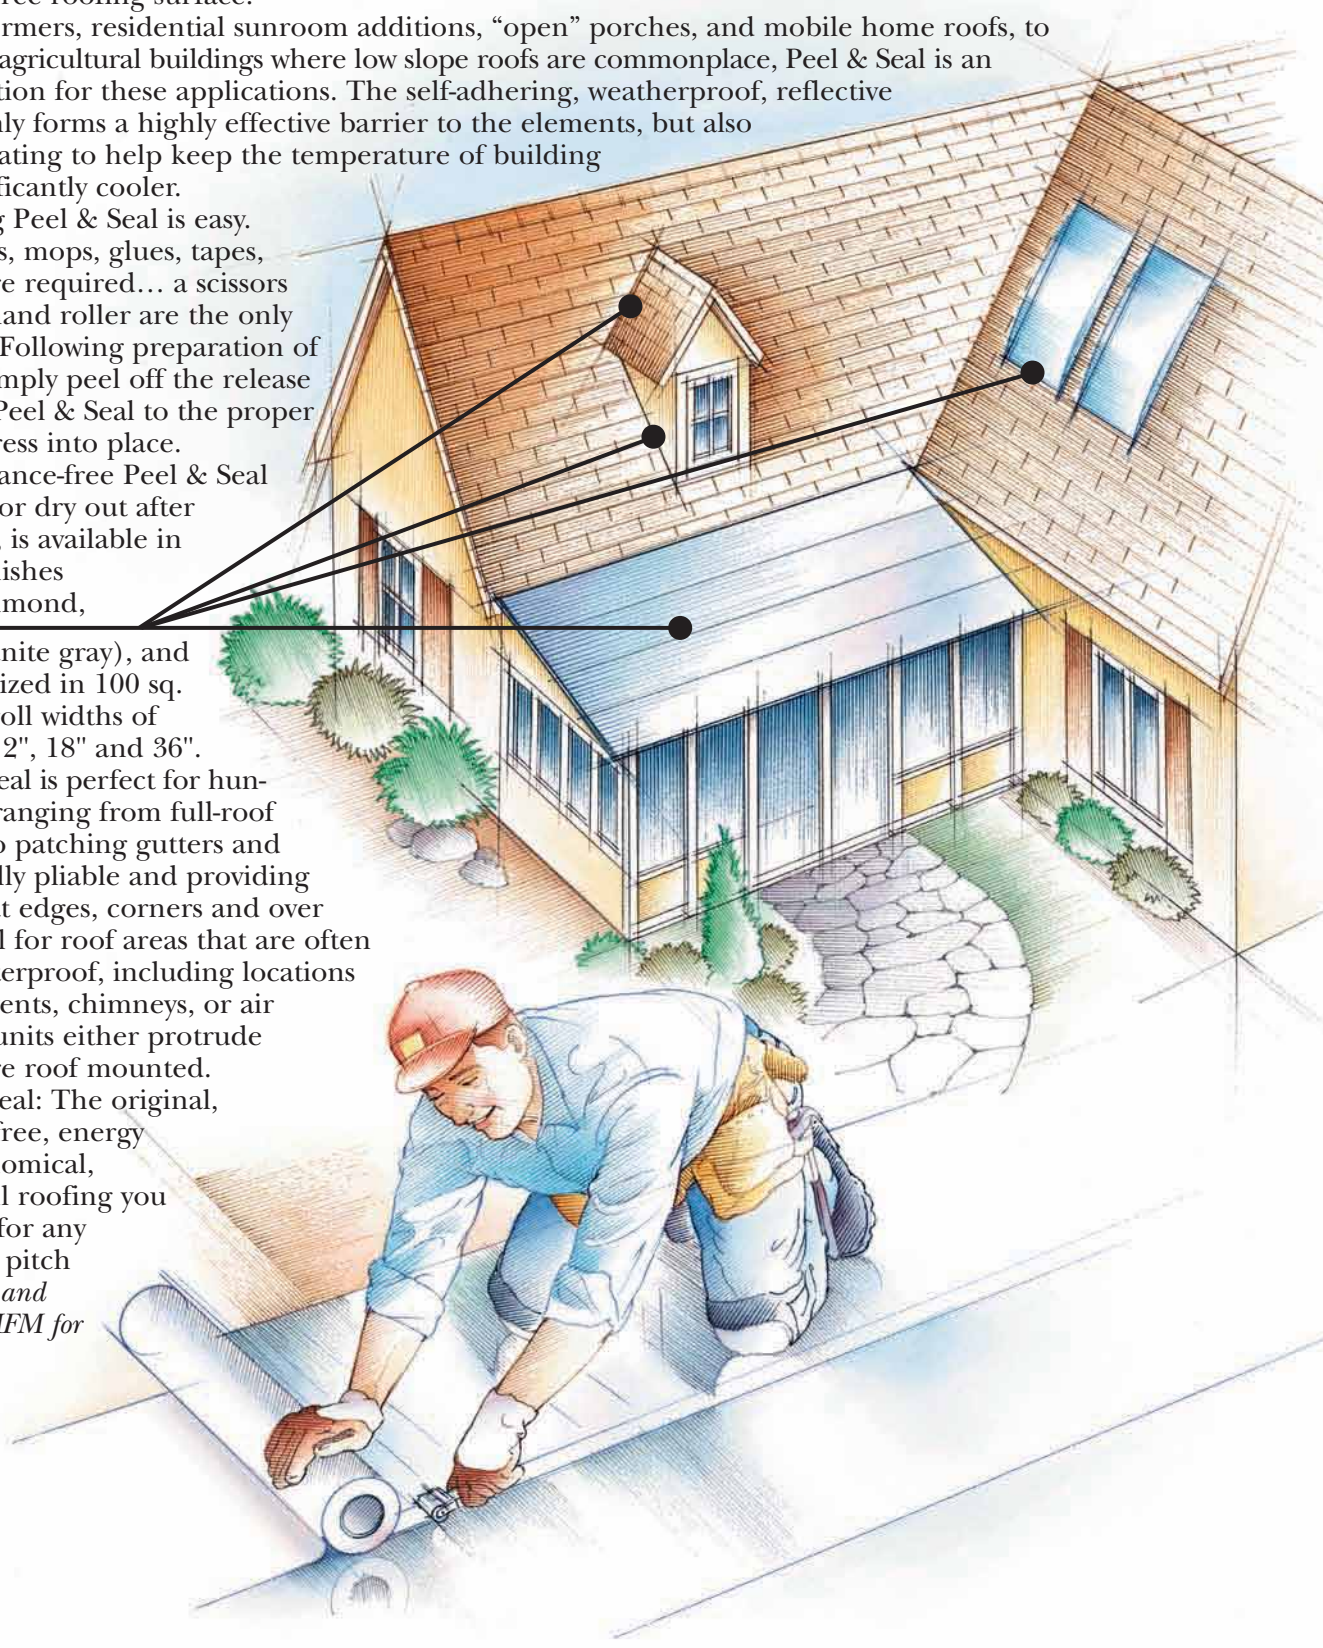


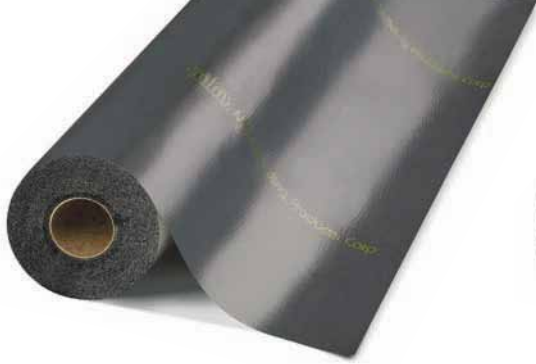

SubSeal-60™ A thick, heavy-duty, self-adhering membrane that is an excellent choice for horizontal and vertical waterproofing applications, and is perfect for all below-grade construction and through-wall flashing. SubSeal-60 is also an effective multi-purpose, weather and waterproofing barrier for exterior application on both block and poured foundations to aid in keeping basements dry and comfortable.

ShingleStarter™ An innovative, timesaving concept in the application of traditional, shingled roofs. It eliminates the need to cut shingle tabs as the starter course. Simply unroll and press self-adhesive ShingleStarter at the roof edge, and position and nail the first course of shingles over ShingleStarter; they will aggressively adhere to the seal tab in order to prevent any wind uplift!

IB-3™ A superior waterproofing underlayment featuring a granulated surface that protects against ice dams and blowing rain from entering the structure interior on new or re-roofing projects. The self-adhesive backing forms a strong bond to the roof deck, and the tough, rubberized asphalt self-seals around nails. The backing liner is scored in the center of the sheet to aid in providing quick, easy installation of IB-3 in valley areas.

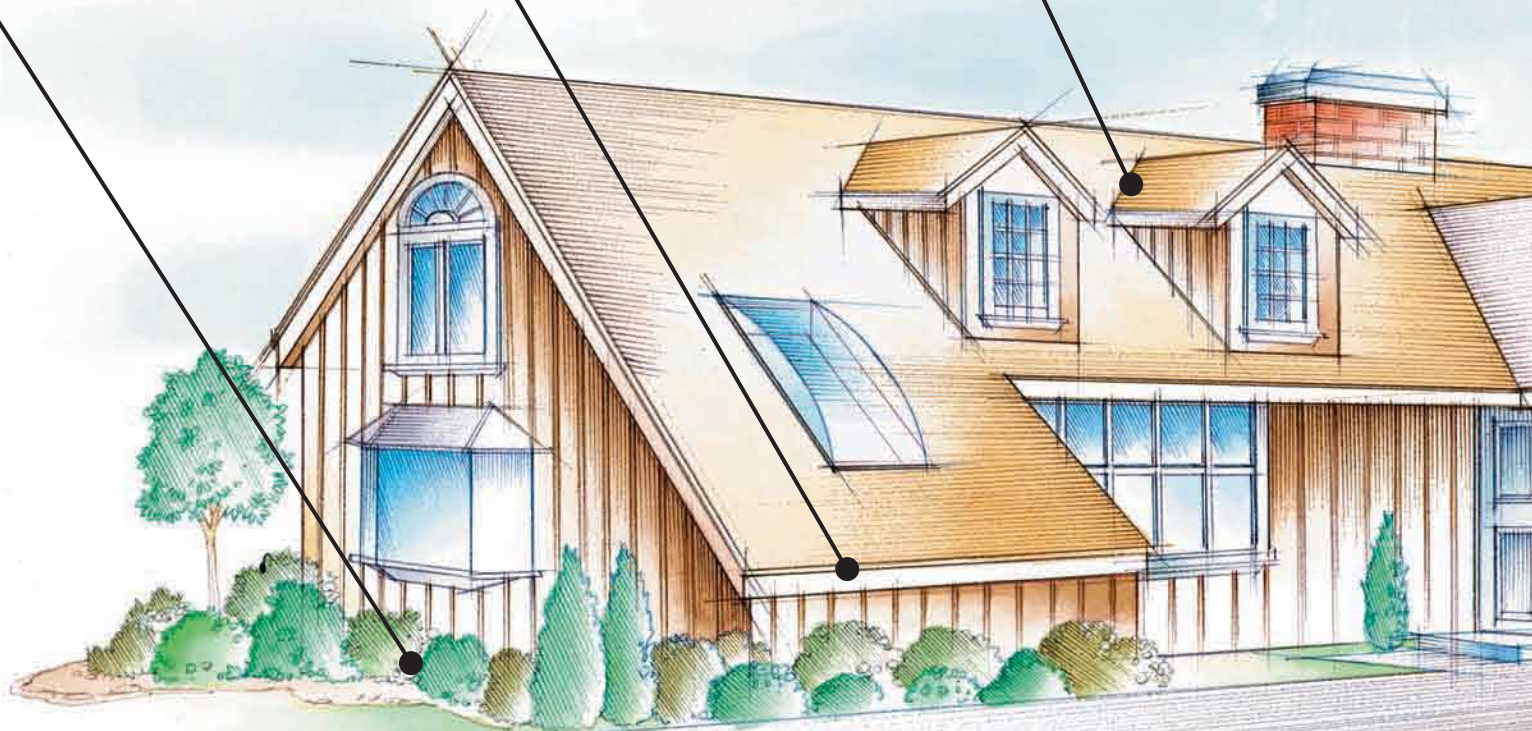





WindowWrap™ Effectively stops water leaks around windows and doors while reducing outdoor noise and air infiltration. The aggressive adhesive securely bonds the window flange to the exterior wall, and the rubberized asphalt self-seals around nails and staples. Designed for the professional homebuilder – where construction delays are common – the tough, durable, aluminized surface of WindowWrap is unaffected by UV exposure for a minimum of six months after being applied to the window!

MFM Wind & Water Seal™
A durable underlayment that is an excellent, self-sealing alternative to standard roofing felt for all tile and shingle roofs. It provides improved “first seal” protection and coverage over the roof deck, and the textured polymer surface offers secure, slip-resistant footing during application.

Post & Pole™ Helps prevent rotting of deck and fence posts, utility poles, and pole buildings by preventing the soil or concrete from coming into direct contact with these important structural elements. Can be used as a barrier with ACQ-treated wood or to protect untreated wood, concrete, brick, stucco, and even metal! Adds years of life to all post and pole applications.

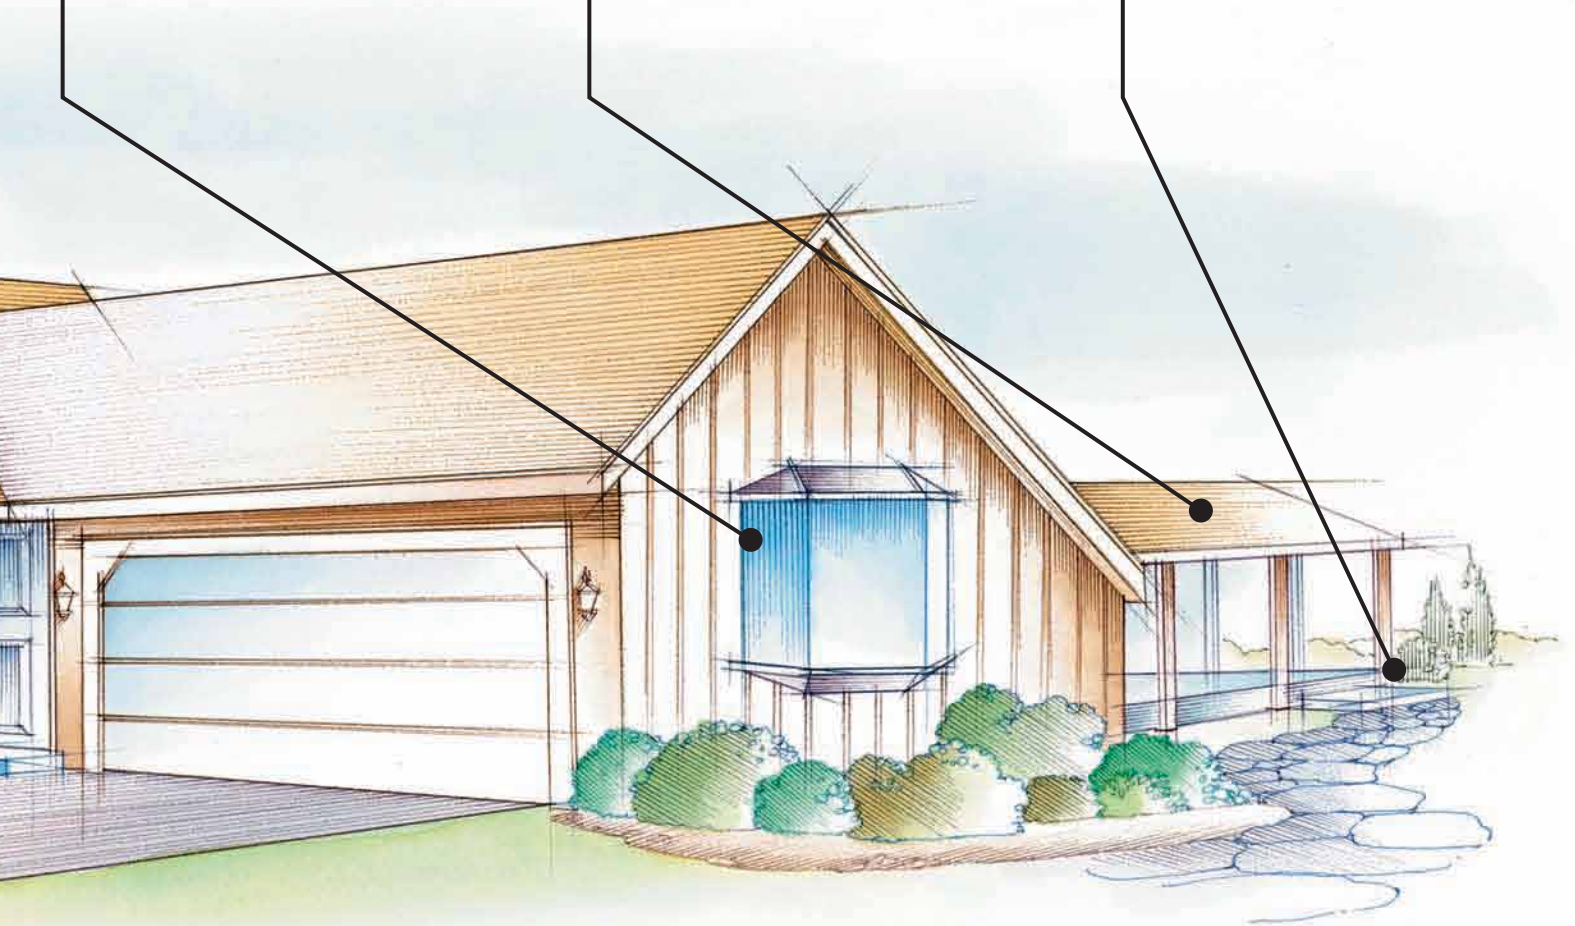

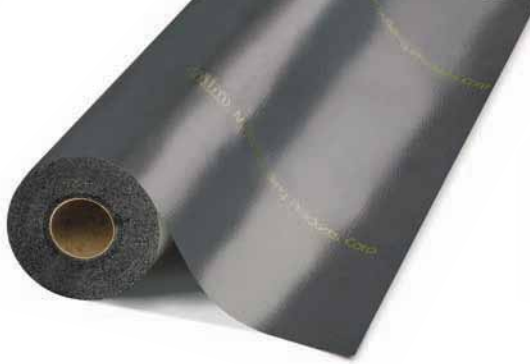

T-Seal™


Protects one of the most overlooked areas in a home from the infiltration of dust, insects, water leaks, and drafts: Door thresholds and sill plates. It provides a positive seal between the floor deck and the threshold eliminating any outside intrusion at this critical area. The self-adhesive backing makes application simple, and the self-sealing feature of T-Seal prevents leaks around nails and screws. T-Seal also stops corrosion from the chemical reaction occurring between aluminum and concrete, and helps prevent moisture from wicking into doorjamb from the deck surface.

SubSeal-40™

A self-adhering, asphalt-coated membrane that is an excellent choice for both horizontal and vertical waterproofing applications. Perfect for below-grade construction such as plaza decks, pot shelves, balconies, exterior plaster and through-wall flashing, and is unaffected by the hot summer sun and radiant heat. SubSeal-40 is also an effective, multi-purpose, weather and waterproofing barrier for exterior application on both block and poured foundations.

Black Wind & Water Seal™

A high-strength, self-adhering barrier for new construction and re-roofs where blowing rain, ice dams, or excessive water is anticipated. The sand top surface contains non-woven fiberglass mat coated with specially formulated, rubberized asphalt adhesive to seal around nails. Backed with a scored release sheet for easy installation to the roof deck at eaves, valleys, vents, skylights, and chimneys, it is an ideal underlayment for shingle and tile roofs. It won't crack or dry out, and it can also be installed over the entire roof surface as a secondary water barrier.

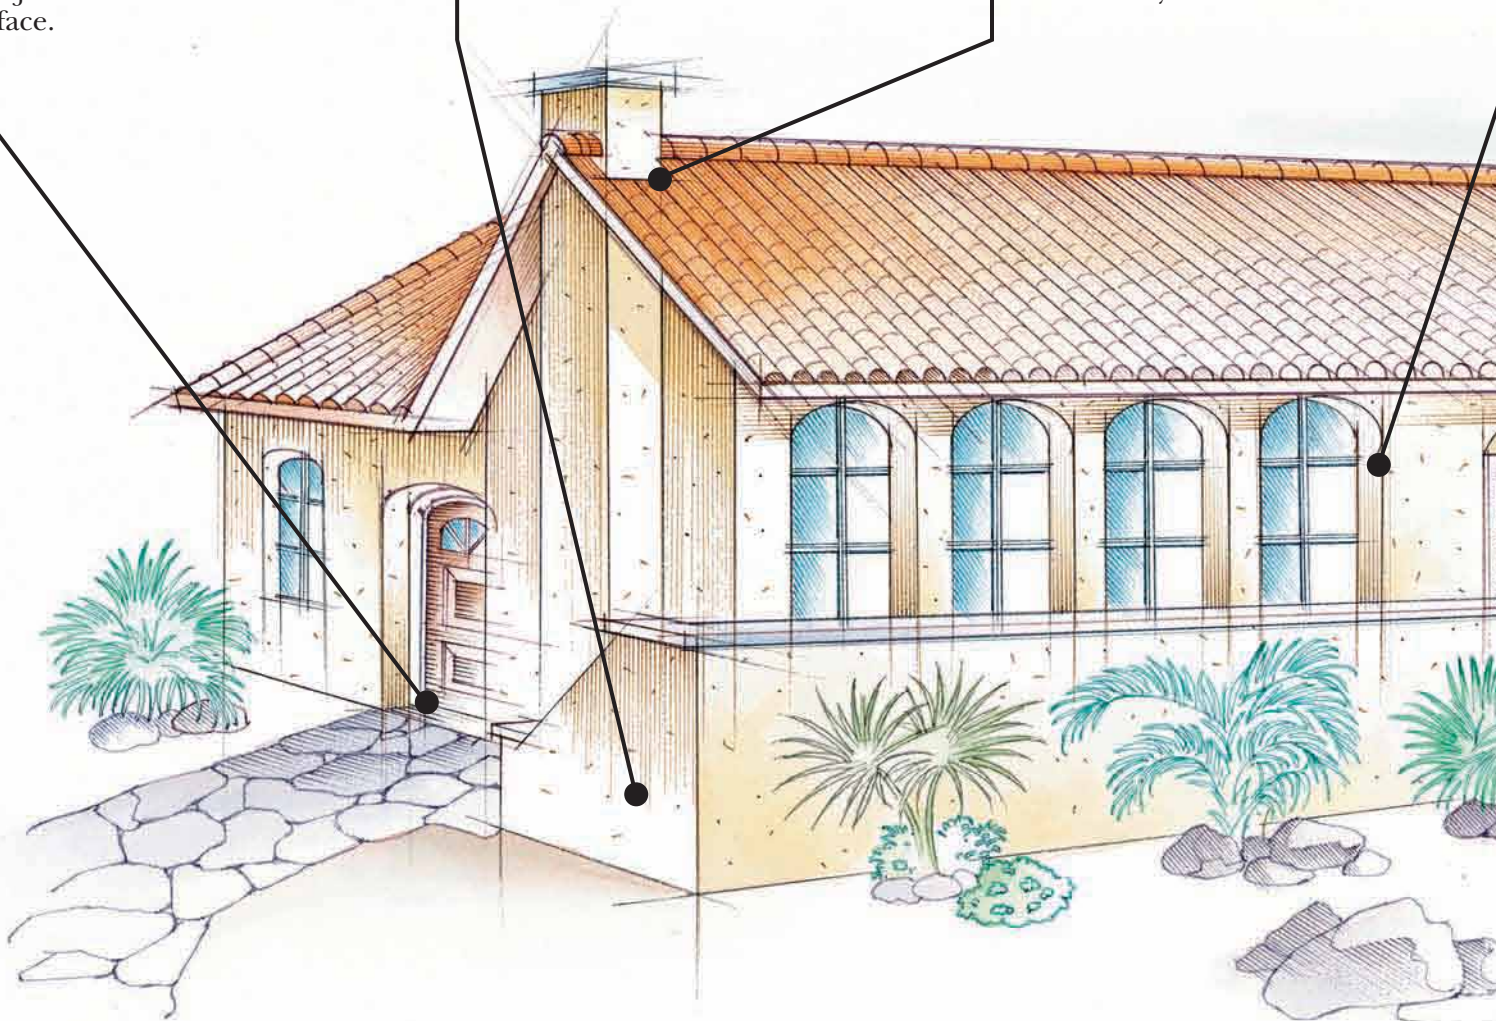




WindowWrap™-Flex When maximum flexibility is called for in a flashing system, WindowWrap-Flex has no equal. A strong polyethylene crepe film with a rubberized asphalt layer easily stretches around sills, arched windows, doorways, and other irregular openings. Even round window openings are no longer difficult! WindowWrap-Flex is easy to apply, and self-seals around nails, screws, and staples. Apply directly to OSB or wood sheathing, under almost any exterior surface, including brick, stucco, vinyl or metal siding. The result is a secure barrier against rain, moisture, and wind – and a quieter, more energy-efficient structure in the long run.

Premium Wind & Water Seal™ Provides ultimate protection for any roofing job whether shingles, tile, or metal are being installed. Premium Wind & Water Seal is an ideal underlayment for the entire roof because it will continue to provide protection even if *all* shingles or the finished surface have blown off, i.e.: hurricane, tornado, or severe storm damage! Application is easy: simply peel off the backing paper from the adhesive surface, and press into place. Premium Wind & Water Seal's self-sealing properties – even over nails – will maintain the integrity of the roof surface to keep it sound and secure for many years.

RidgeSeal™ A superior sealing barrier for use when installing concrete shingles and tile roofs. It also eliminates costly and time-consuming mortar applications to critical hip and ridge areas where blowing rain can enter. The superb flexibility makes application proceed quickly, while the self-sealing qualities of RidgeSeal create an excellent weather- and insect-blocking barrier. And because of its strength, composition and durable UV-resistant surface, RidgeSeal can be left exposed after application, and prior to the installation being completed, for up to six months.

(For construction situations where unlimited exposure times might occur, specify MFM RidgeSeal Plus™. The formulation of RidgeSeal Plus makes it impervious to the effects of weather conditions and sunlight.)

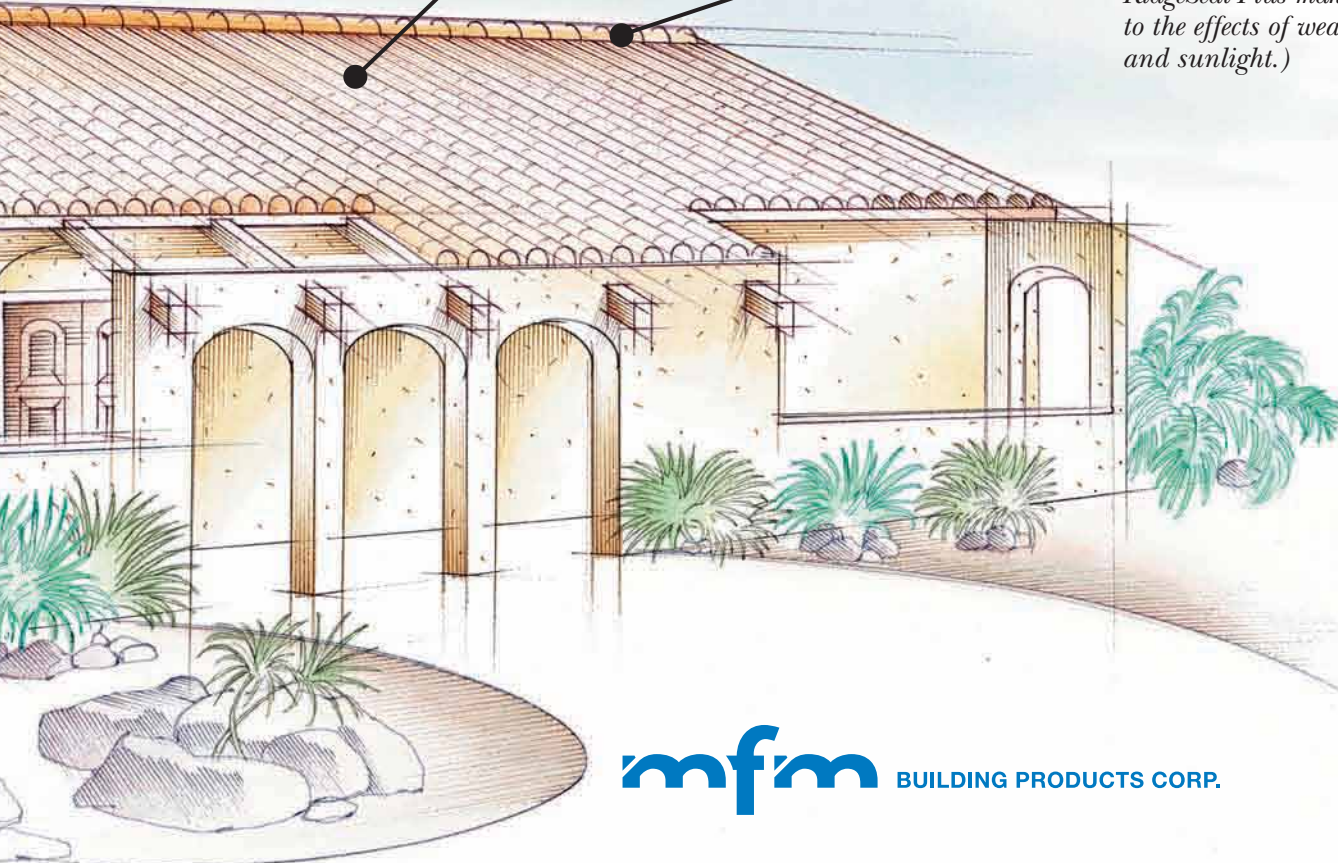

Product	Width	Length	Color	Thickness
Peel & Seal The original, self-stick rolled roofing. Perfect for low slope applications, patching, and forming around protrusions. Meets Energy Star® guidelines for efficiency.	36", 18", 12", 9", 6", 4", 3"	33.5'	Aluminum, Almond, Granite Gray or White	45 mils
RidgeSeal Self-adhesive hip and ridge tape for use with clay and concrete tile roofs. Prevents costly water damage from wind-driven rain.	9"	50'	Dark Gray	35 mils
RidgeSeal Plus Self-adhesive hip and ridge tape. Black aluminum surface allows product to be exposed indefinitely.	9"	50'	Black	35 mils
Premium Wind & Water Seal Premium underlayment for use under metal, shingles, or tile. Provides leak protection if main roof covering is damaged. Textured surface for traction.	36"	75'	Black	42 mils
MFM Wind & Water Seal Self-adhering polymer underlayment excellent for use under clay, tile and shingles. Seals around fasteners. Textured surface for traction.	36"	67'	Black/White	40 mils
Black Wind & Water Seal Self-adhering underlayment prevents damage from ice build-up and wind-driven rain. Excellent for use under shingles and tile roofing. Granular surface with seldedge.	36"	50'	Black	55 mils
IB-3 Self-adhering underlayment prevents damage from ice build-up and wind-driven rain. Perforated backing sheet for ease of installation. Granular surface.	36" 36"	67' 75'	Black Black	50 mils 50 mils
ShingleStarter Self-adhering starter course and underlayment for asphalt shingle roofs. Black sanded surface. Adhesive strip bonds to shingles.	7.2"	33.5'	Black	50 mils
WindowWrap Patented, self-adhering flashing tape for sealing windows, doors, and wall seams. Up to 180-day exposed UV protection.	12", 9", 6", 4"	100'	Silver	25 mils
WindowWrap-Flex Strong polyethylene crepe film flexes and stretches for sealing around curved shapes, sills, arched or round-top windows.	12", 9", 6", 4"	50'	White	70 mils
SubSeal-40 Multi-purpose waterproofing membrane for roofing, siding, exterior stucco, through-wall flashing or sub-grade applications.	36", 18", 12", 9", 6"	75'	Black	40 mils
SubSeal-60 Multi-purpose waterproofing membrane for use in foundations, planters, building envelopes and roofing.	36", 12"	60'	Black	60 mils
T-Seal Flexible protection for door thresholds, sill plates, and sealing between the exterior wall and foundation. Keeps out air, water and insects. Fights chemical reaction between aluminum and concrete.	12", 9", 6"	37'	White	40 mils
Post & Pole Prevents ground level and sub-grade rotting of posts and poles. Ideal for decks, fences, pole buildings, utility poles. Fights corrosion of metal hangers caused by concrete and treated lumber, and resists termites. Use as barrier with ACQ-treated lumber.	12", 6", 3"	25'	Black	40 mils

MFM products are protected under U.S. Patent Nos. 4,936,938; 5,096,759; 5,142,837; 6,103,356; 6,479,119; 6,627, 017.



BUILDING PRODUCTS CORP.

P.O. Box 340 • Coshocton, Ohio 43812
800-882-7663 • www.mfmbp.com